
Convectors

CNS-B 2000 Plus LCD Move

ORDER NO: 207068

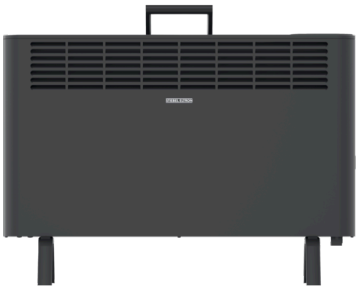

CNS 2000 Plus LCD Move

ORDER NO: 207060

Key features

- Elegant freestanding convector in a timeless design casing
- High heating output despite slimline design
- Highly safe due to pendulum switch which switches the appliance off if knocked over
- Splashproof tested for use in bathrooms
- Electronic controller with illuminated LCD screen
- Safety through overheating protection
- Weekly timer with 3 time programs, self-learning function and window open detection
- Integrated handle
- Long lasting stainless steel tubular heater with steel fins
- Colour: Black (approx. RAL 7021)

STIEBEL ELTRON

Technical data sheet





Type	CNS 2000 Plus LCD Move ORDER NO: 207060	CNS-B 2000 Plus LCD Move ORDER NO: 207068
Order No	207060	207068

Electrical data

Power supply	1/N/PE ~ 230 V	1/N/PE ~ 230 V
Rated voltage	230 V	230 V
Voltage range	230 V	230 V
Frequency	50/- Hz	50/- Hz
Rated current	8,7 A	8,7 A
Connected load	2 kW	2 kW
Phases	1/N/PE	1/N/PE
Fuse protection	16 A	16 A

Versions

Number of heating stages	1	1
IP rating	IP24	IP24
Protection class	I	I
Colour	white (similar to RAL 9003)	Black (approx. RAL 7021)
Frost protection setting	7 °C	7 °C
Safety system	Temperature limiter with automatic reset	Temperature limiter with automatic reset

Version	Floor mounted appliance	Floor mounted appliance
Values		
Setting range	5-30 °C	5-30 °C
Dimensions		
Height	443 mm	443 mm
Width	738 mm	738 mm
Height including feet	524 mm	524 mm
Depth	80 mm	80 mm
Depth including feet	208 mm	208 mm
Weights		
Weight	7.90 kg	7.90 kg
Energy data		
Rated heating output Pnom	2.00 kW	2.00 kW
Maximum continuous heating output Pmax,c	2.00 kW	2.00 kW
Minimum heating output (standard value) Pmin	0.00 kW	0.00 kW
Room heating seasonal efficiency ηs	39 %	39 %
with minimum heating output elmin	0.00 kW	0.00 kW
with rated heating output elmax	0.00 kW	0.00 kW
in standby mode elSB	0.00 kW	0.00 kW

Room temperature control with window open detection	x	x	
Room temperature control with presence detection	-	-	
Single stage heating output, no room temperature control	-	-	
Electronic room temperature control plus day timer	-	-	
Electronic room temperature control plus week timer	x	x	
With electronic room temperature control	-	-	
Room temperature control with mechanical thermostat	-	-	
Two or more manual stages, no room temperature control	-	-	
With adaptive start control	x	x	
With working time limitation	-	-	
With distance control option	-	-	
With black bulb sensor	-	-	

STIEBEL ELTRON

Contact information

You have questions? We appreciate to help you:

Call **+27 10 001 85 47** Write an email to **info@stiebel-eltron.co.za**

Installation information

Please ask your local power supply utility or a registered electrician to install appliances that are not fully wired, i.e. ready to plug in. The electrician should also be able to assist you with obtaining the agreement of the respective power supply utility required for the appliance installation.

Website

www.stiebel-eltron.co.za