
Small heaters

IW 120

ORDER NO: 229339

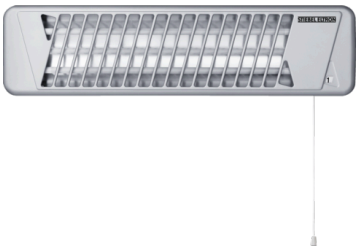

Key features

- Full metal casing
- Pull-cord activation
- Display shows the switching position in the indicator window



Type	IW 120 ORDER NO: 229339
Order No	229339

Electrical data

Power supply	1/N/PE ~ 230 V
Rated voltage	230 V
Frequency	50/60 Hz
Rated current	5.2 A
Rated output	1.2 kW
Phases	1/N/PE
Fuse protection	10 A

Values

Output stages	3

Versions

IP rating	IPX4
Protection class	I
Protection class	I to EN 60335
Colour	silver
Application	Wall mounting

Installation type	Indoor/outdoor installation

Dimensions

Height	145 mm
Width	535 mm
Depth	85 mm

Energy data

Rated heating output Pnom	1.20 kW
Maximum continuous heating output Pmax,c	1.20 kW
Minimum heating output (standard value) Pmin	0.00 kW
Room heating seasonal efficiency ηs	32 %
with minimum heating output elmin	0.00 kW
with rated heating output elmax	0.00 kW
in standby mode elSB	0.00 kW
Room temperature control with window open detection	-
Room temperature control with presence detection	-
Single stage heating output, no room temperature control	-
Electronic room temperature control plus day timer	-
Electronic room temperature control plus week timer	-
With electronic room temperature control	-
Room temperature control with mechanical thermostat	-
Two or more manual stages, no room temperature control	x
With adaptive start control	-

With working time limitation	-
With distance control option	-
With black bulb sensor	-

STIEBEL ELTRON

Contact information

You have questions? We appreciate to help you:

Call **+27 10 001 85 47** Write an email to **info@stiebel-eltron.co.za**

Installation information

Please ask your local power supply utility or a registered electrician to install appliances that are not fully wired, i.e. ready to plug in. The electrician should also be able to assist you with obtaining the agreement of the respective power supply utility required for the appliance installation.

Website

www.stiebel-eltron.co.za